




Aluminum Vacuum Tubing


Features & Benefits

- ◆ Lightweight, sturdy aluminum construction (up to .083 Wall).
- ◆ Available with or without pressed in couplers for fast "on the job" assembly and disassembly.
- ◆ Friction-free, smooth bores for maximum material loading rates.
- ◆ Capable of handling wet, dry or extremely hot materials (Temperature rating: -40° to 1000°F).
- ◆ Ideal for long horizontal or vertical runs.
- ◆ Available in sizes from 2 1/2" to 12" ID. 10 and 20 foot sections.

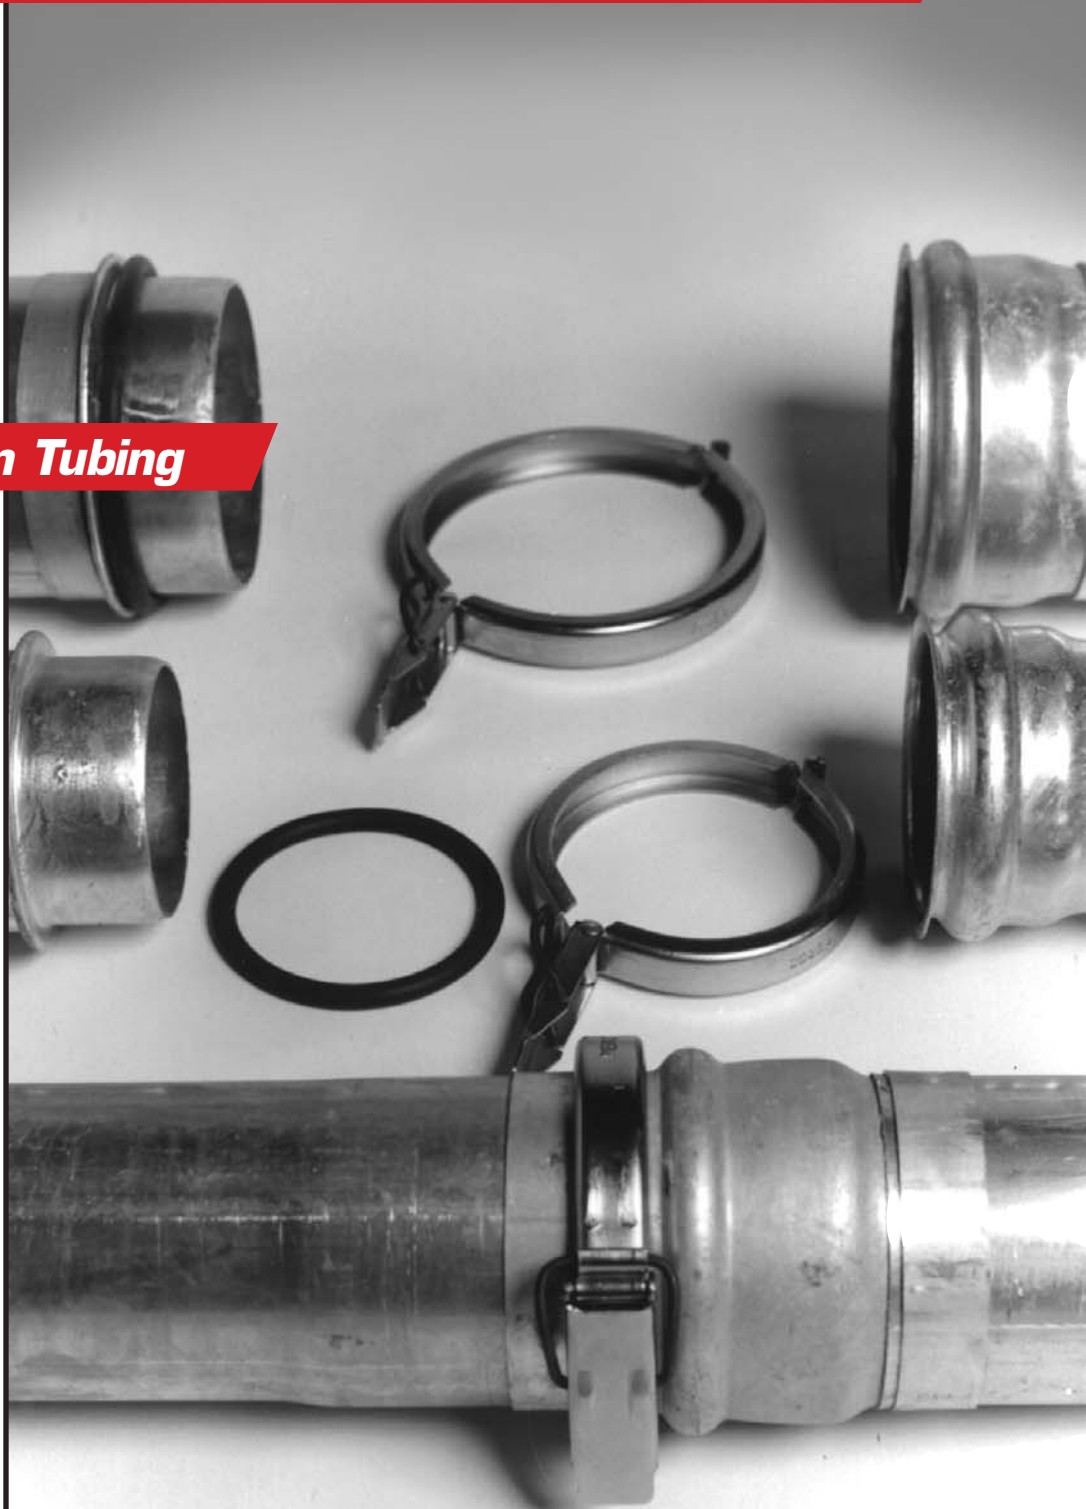

Aluminum Vacuum Tubing

Problem:

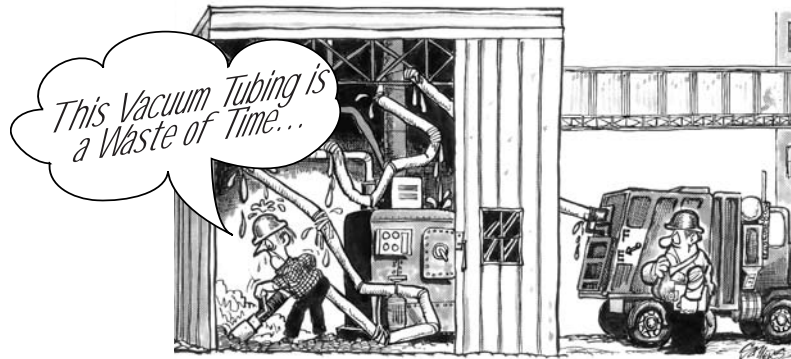

Specifications

Part No.	Order No.	Outside Diameter (In.)	Length (Ft.)	TUBE		Temp. Range (°F)	Weight lbs/ft
				Wall Thickness	Material		
11-111-01	AL-2 1/2-20-VT	2 1/2	20	.051	5050 Hi Silicone Aluminum	-40°F to +1000°F	14
11-111-02	AL-3-20-VT	3	20	.051			16
11-111-04	AL-4-20-VT	4	20	.072			26
11-121-05	AL-6-10-MVT	6	10	.083			29
11-121-06	AL-6-20-MVT	6	20	.083			47
11-111-07	AL-8-10-VT	8	10	.058			34
11-111-08	AL-8-20-VT	8	20	.058			55

Ormsen vacuum tubing is also available in zinc or plain carbon steel. Contact Ormsen Corporation for prices and specifications. Specifications subject to change without notice.

Solution:

*Lightweight,
Fast Set-Up, with
Vacuum Gaskets that
Insure Leak-Proof Vacuum
Tubing for Maximum
Productivity!*



FAST-VAC™ P. O. Box 241 • Hartland, WI 53029

Ph: 800-558-2280 Fax: 800-558-2281
Int'l Ph: 262-367-2280 Int'l Fax: 262-367-7245 email: sales@fast-vac.com

www.fast-vac.com